

**Harvatek Surface Mount CHIP LEDs Data Sheet
B33NBFCH-F6C-0003HR****DISCLAIMER.....3**

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.	03/26/2019	Version 1.0	Page 1/15

LIFE SUPPORT POLICY	3
PRODUCT SPECIFICATIONS	4
ATTENTION: ELECTROSTATIC DISCHARGE (ESD) PROTECTION	5
LABEL SPECIFICATIONS	6
SPECIFICATIONS RANGE	7
PRODUCT FEATURES	7
ELECTRO-OPTICAL CHARACTERISTICS	8
PACKAGE OUTLINE DIMENSION AND RECOMMENDED SOLDERING PATTERN FOR REFLOW SOLDERING	8
PRECAUTION FOR USE	10
PACKAGING	11
TAPE DIMENSION	11
REEL DIMENSION	12
PACKING	12
DRY PACK	13
BAKING	13
PRECAUTIONS	13
REFLOW SOLDERING	14
REWORKING	14
CLEANING	14
CAUTIONS OF PICK AND PLACE	15
REVISE HISTORY	15

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.	03/26/2019	Version 1.0	Page 2/15

DISCLAIMER

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.	03/26/2019	Version 1.0	Page 3/15

Product Specifications

Item	Specification	Material	Quantity
Luminous Intensity(lv)	R : min 14 mcd G : min 19 mcd B : min 2.5 mcd R@5mA;G/B@2mA/ $T_s = 25^\circ\text{C}$;Tolerance: $\pm 10\%$		
Wavelength	R : min 618.0 nm G : min 528.0 nm B : min 466.0 nm R@5mA;G/B@2mA/ $T_s = 25^\circ\text{C}$;Tolerance: $\pm 0.5\text{nm}$		
Vf	R : 1.6-2.4 V G : 2.2-3.0 V B : 2.2-3.0 V R@5mA;G/B@2mA/ $T_s = 25^\circ\text{C}$;Tolerance: $\pm 0.05\text{V}$		
Ir	< 1 μA @ $V_R = 5\text{V}$		
Resin	Dark	Epoxy	
Carrier tape	EIA 481-1A specs	Conductive black tape	12000ea/reel
Reel	EIA 481-1A specs	Conductive black	
Label	HT standard	Paper	
Packing bag	220x240mm	Aluminum laminated bag/ no-zipper	One reel per bag
Carton	HT standard	Paper	Non-specified

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/26/2019	Version 1.0
			Page 4/15

Others:

Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin combinations of I_v , λ_D and V_f . Each reel has a label identifying its specification; the immediate box consists of a product label as well.

Note :This is shipped test conditions



※Remarks: This product should be operated in forward bias. If a reverse voltage is continuously applied to the product, such operation can cause migration resulting in LED damage.

ATTENTION: Electrostatic Discharge (ESD) protection

The symbol to the left denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are **STATIC SENSITIVE devices**. ESD precaution must be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.	03/26/2019	Version 1.0	Page 5/15

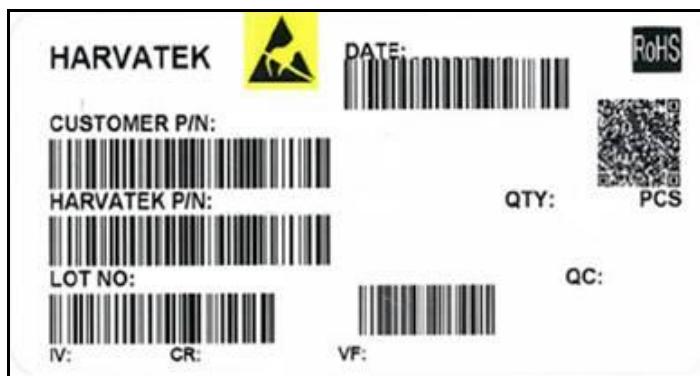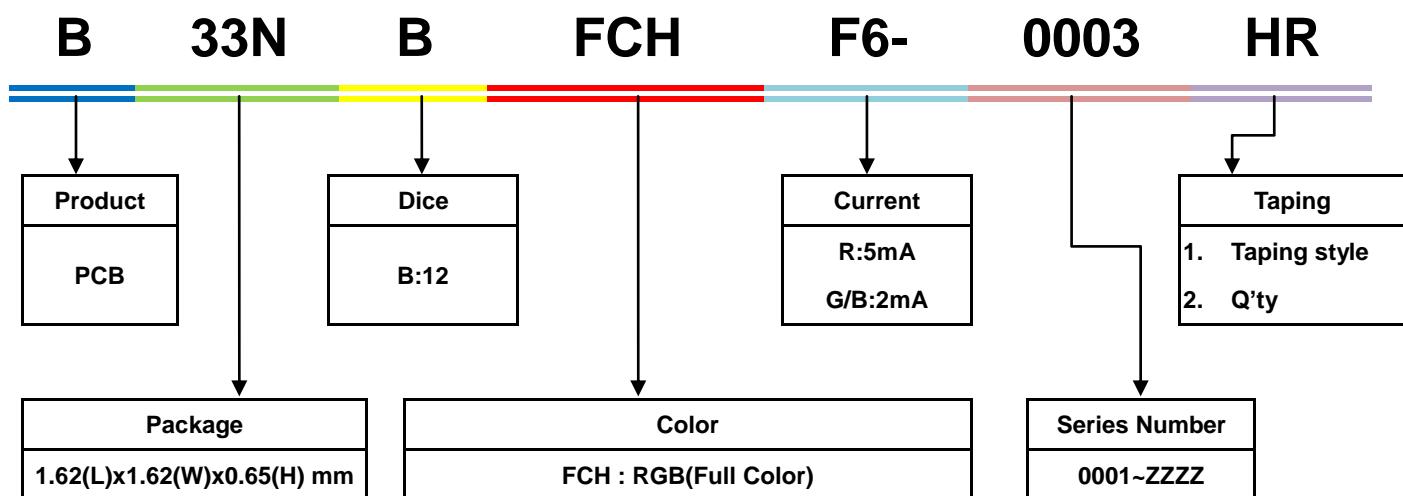Label Specifications**■ Harvatek P/N:****■ Lot No.:**

1	2	3	4	5	6	7	8	9	10
E	1	A	1	A	2	2	L	1	2
Code 1 2	Code 3	Code 4	Code 5	Code 6	Code 7	Code 8	Code 9	Code 10	
	Mfg. Year	Mfg. Month	Mfg. Date	Consecutive number		Special code			
Internal Tracing Code	2010-A 2011-B 2012-C ... 2018-I/J 2019-K ... 2022-N 2023-P ...	1:Jan. 2:Feb. ... A:Oct. B:Nov. C:Dec.	1:A 2:B 3:C ... 26:Z 27:7 28:8 29:9 30:3 31:4	01~ZZ		000~ZZZ			

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/26/2019	Version 1.0
			Page 6/15

Specifications Range**Luminous Intensity (I_v) Bin:****Luminous Intensity (I_v) Bin:R@5mA;G/B@2mA**

HT- B33NBFCH Series											
IV											
Red				Green				Blue			
Min	14	Max	28	Min	19	Max	38	Min	2.5	Max	5.0

Bin name(R/G/B):V005

Note: It maintains a tolerance of $\pm 10\%$ on luminous intensity**Dominant Wavelength (λ_D) Bin:**

HT- B33NBFCH Series											
WD											
Red				Green				Blue			
Min	618	Max	628	Min	528	Max	538	Min	466	Max	476

Bin name(R/G/B):D003

Note: It maintains a tolerance of $\pm 0.5\text{nm}$ on color**Forward Voltage (V_f) Bin:**

HT- B33NBFCH Series											
VF											
Red				Green				Blue			
Min	1.6	Max	2.4	Min	2.2	Max	3.0	Min	2.2	Max	3.0

Bin name(R/G/B):F002

Note: It maintains a tolerance of $\pm 0.05\text{V}$ on forward voltage measurements

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/26/2019	Version 1.0
		Page 7/15	

Product Features

Electro-Optical Characteristics

(T _{Soldering} , 25 °C)									
Series	Emitting Color	Material	V _F (V)		Wavelength λ (nm)			I _V (mcd)	Viewing Angle $\theta = \frac{1}{2}$
			typ	max	λ_D	λ_P	$\Delta \lambda$	min	
B33NBFCH-F6	Red	AlInGaP	2.0	2.4	621	631	20	14	>120
	Green	InGaN	2.5	3.0	532	522	30	19	>120
	Blue	InGaN	2.6	3.0	469	466	20	2.5	>120

Package Outline Dimension and Recommended Soldering Pattern for Reflow Soldering

(Unit:mm Tolerance: +/-0.1)

Outline Dim.

Soldering Pattern

Cathode Polarity

Soldering terminals may shift in the x, y direction.

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.	03/26/2019	Version 1.0	Page 8/15

($T_{Soldering}$ 25 °C)**Absolute Maximum Ratings**

Series	P_D (mW)	V_R (V)	I_F (mA)	I_{FP} (mA)*	Top(°C)
Color	Power Dissipation	Reverse Voltage	Forward Current	Pulse Forward Current	Operating Temperature
Red	15	5	5	15	-30~+80
Green	10	5	2	15	
Blue	10	5	2	15	

*Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width

*Remarks:This product should be operated in forward bias.If a reverse voltage is continuously

applied to the product, such operation can cause migration resulting in LED damage.

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/26/2019	Version 1.0
			Page 9/15


Precaution for Use

1. The chips should not be used directly in any type of fluid such as water, oil, organic solvent, etc.
2. When the LEDs are illuminating, the maximum ambient temperature should be first considered before operation.
3. LEDs must be stored in a clean environment. A sealed container with a nitrogen atmosphere is necessary if the storage period is over 3 months after shipping.
4. The LEDs must be used within 4 weeks after unpacked. Unused products must be repacked in an anti-electrostatic package, folded to close any opening and then stored in a dry and cool space.
5. The appearance and specifications of the products may be modified for improvement without further notice.
6. The LEDs are sensitive to the static electricity and surge. It is strongly recommended to use a grounded wrist band and anti-electrostatic glove when handling the LEDs. If a voltage over the absolute maximum rating is applied to LEDs, it will damage LEDs. Damaged LEDs will show some abnormal characteristics such as remarkable increase of leak current, lower turn-on voltage and getting unlit at low current.


Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.	03/26/2019	Version 1.0	Page 10/15

Packaging



Tape Dimension

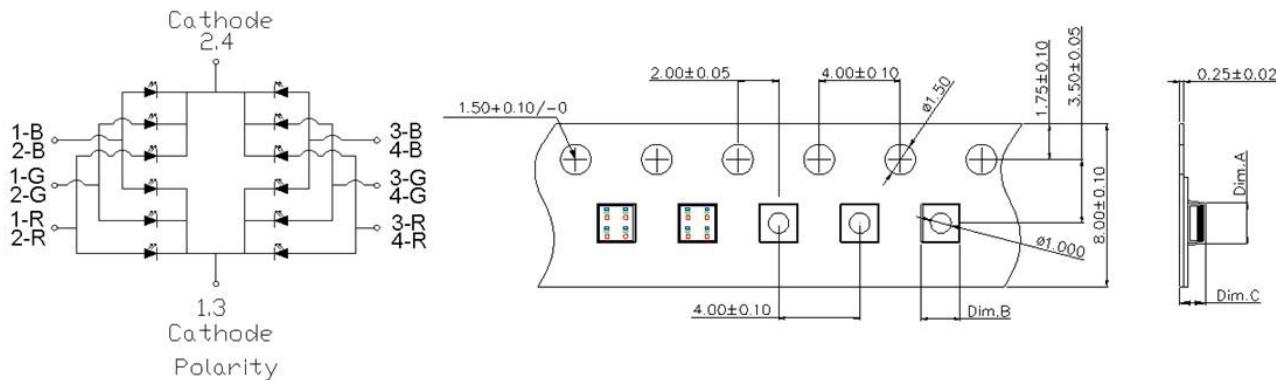

Dim. A	Dim. B	Dim. C	Q'ty/Reel
1.81±0.05	1.81±0.05-	0.81±0.05	12K

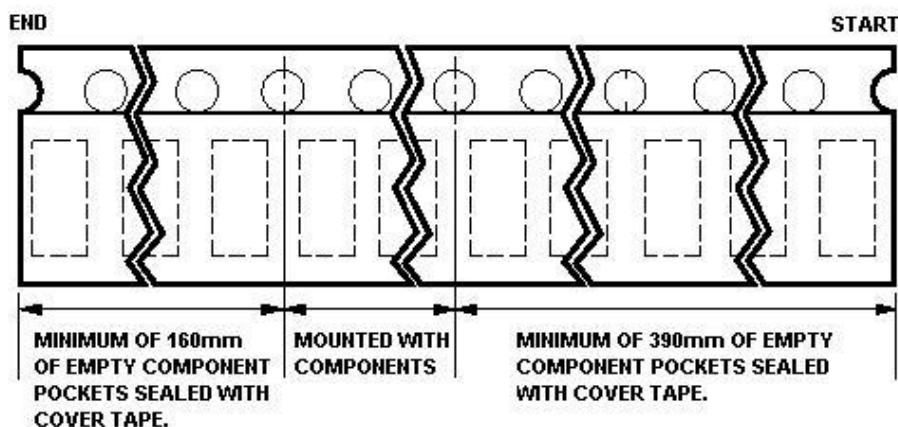

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/26/2019	Version 1.0
			Page 11/15

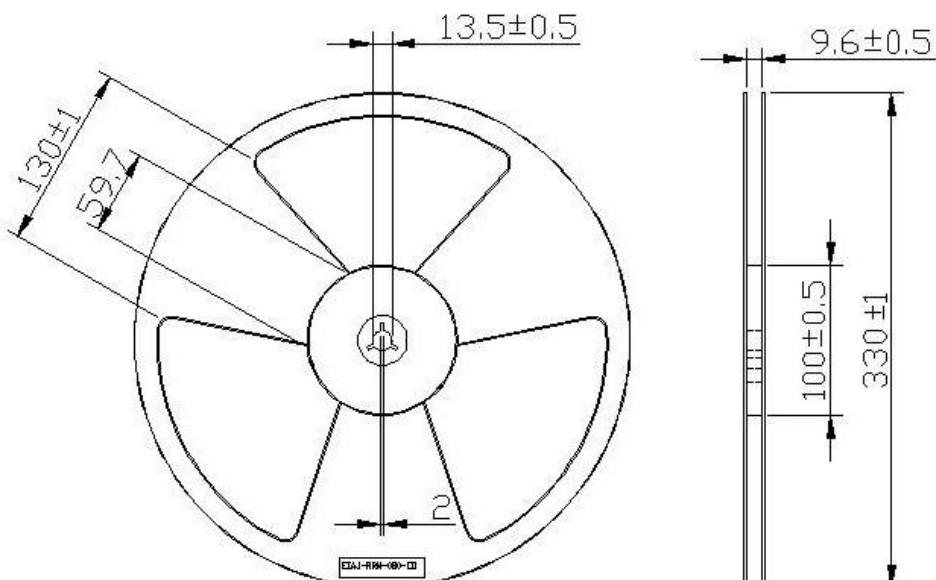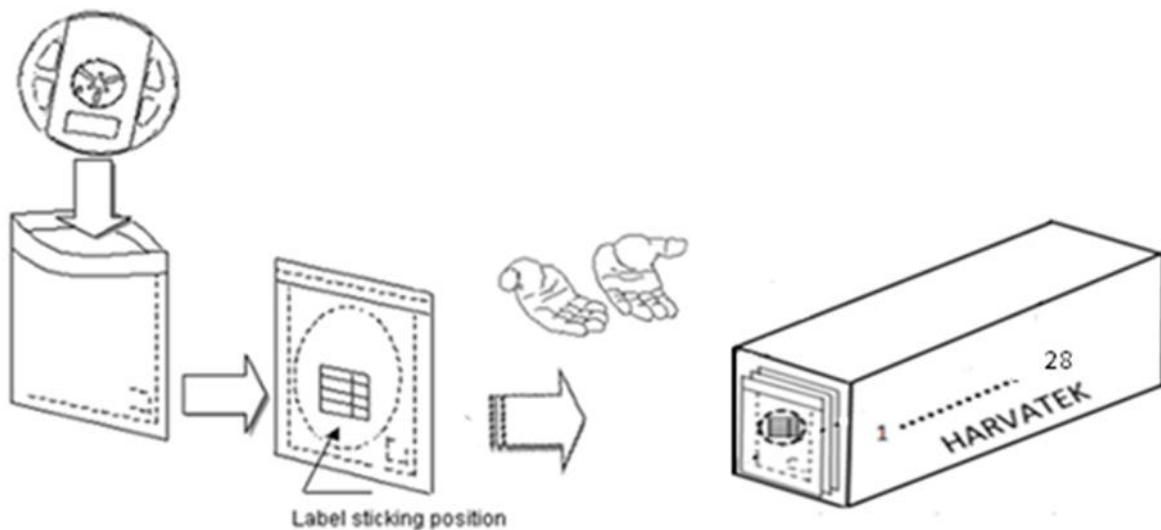Reel Dimension**Packing**

28 boxes per carton is available depending on shipment quantity.

(裝貨量每一紙箱可裝載 28 袋)


Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/26/2019	Version 1.0
			Page 12/15

Dry Pack

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

A humidity indicator will be included in the moisture protected anti-static bag prior to shipment.

The packaging sequence is as follows:

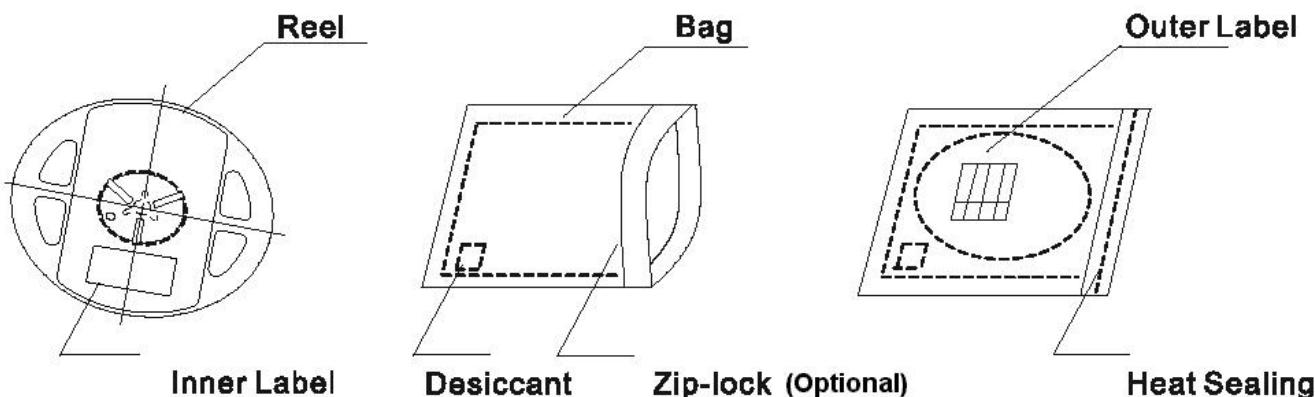

Baking(烘烤)

Baking before soldering is recommended when the package has been unsealed for 4 weeks.

(當包裝已開封四週,在焊接時建議先烘烤)

The conditions are as following:

MBB is unsealed \leq 672 hrs,

Recommended baking conditions : $50 \pm 3^\circ\text{C} \times (3\text{hrs})$.

MBB is unsealed $>$ 672 hrs,

Recommended baking conditions : $60 \pm 3^\circ\text{C} \times (8 \sim 12\text{hrs})$ and $< 5\% \text{RH}$, tape reel type.

$100 \pm 3^\circ\text{C} \times (45\text{min} \sim 1\text{hr})$, bulk type.

$130 \pm 3^\circ\text{C} \times (15\text{min} \sim 30\text{min})$, bulk type.

Precautions

1. Avoid exposure to moisture at all times during transportation or storage.
2. Anti-Static precaution must be taken when handling GaN, InGaN, and AlInGaP products.
3. It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage beyond the specified limit.

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.		03/26/2019	Version 1.0
			Page 13/15


4. Avoid operation beyond the limits as specified by the absolute maximum ratings.
5. Avoid direct contact with the surface through which the LED emits light.
6. If possible, assemble the unit in a clean room or dust-free environment.

Reflow Soldering

Recommend soldering paste specifications:

1. Operating temp.: Above 220°C ,60 sec.
2. Peak temp.:260 °C Max.,10sec Max.
3. Reflow soldering should not be done more than two times.
4. Never attempt next process until the component is cooled down to room temperature after reflow.
5. The recommended reflow soldering profile (measured on the surface of the LED terminal) is as following:

Lead-free Solder Profile

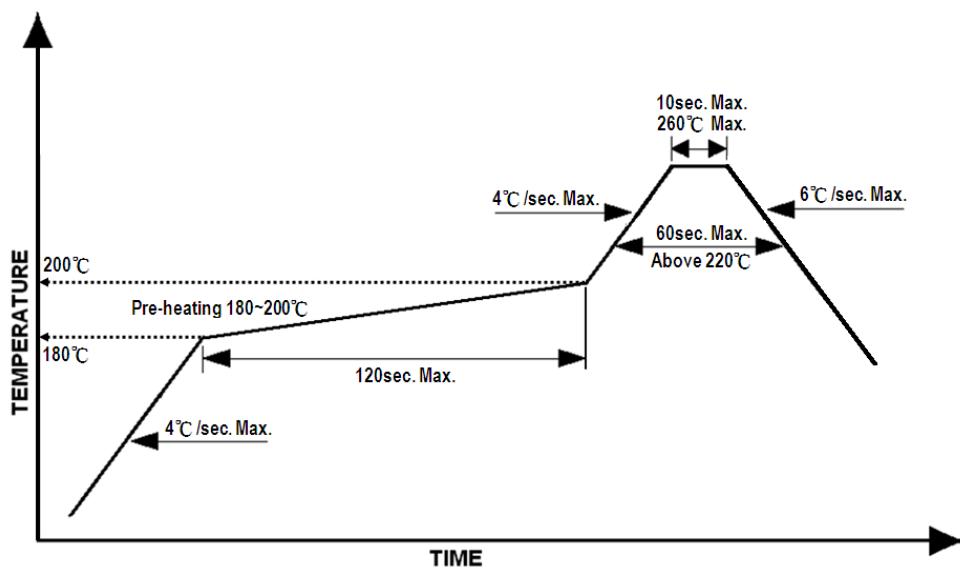

Reworking

- Rework should be completed within 5 seconds under 260 °C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.	03/26/2019	Version 1.0	Page 14/15

- Temperature x Time should be 50°C x 30sec. or <30°C x 3min
- Ultrasonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100 °C max, <3min

Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electric-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

Revise History

Official Product	HT Part No. B33NBFCH-F6C-0003HR	Customer Part No.	Data Sheet No.
Tentative Product	*****	*****	Preliminary
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, company confidential all rights reserved.	03/26/2019	Version 1.0	Page 15/15